

GEARDRIVE Sprinklers *-features*

5500 series

Unadjusted Radius 18' - 30'
 Discharge 0.5 - 2.5 GPM
 Maximum pressure 75 PSI
 Exposed cap diameter 1 7/8" (47.625mm)
 Cap diameter 2 7/8" (73.025mm)
 Inlet size 3/4" (19.05mm)


6000 series

Unadjusted Radius 30' - 51'
 Discharge 1.0 - 9.5 GPM
 Maximum pressure 75 PSI
 Exposed cap diameter 1 7/8" (47.625mm)
 Cap diameter 2 7/8" (73.025mm)
 Inlet size 3/4" (19.05mm)

Acu-Cover® Nozzle Performance

Pressure PSI	Max Radius FT	Min Radius FT	Discharge GPM	Precipitation Rate ¹		Nozzle # & Color	Pressure BAR	Max Radius m	Min Radius m	Discharge L/min	Precipitation Rate ¹			
				IN/HR	IN/HR						mm/hr	mm/hr		
FRODOO SERIES - 13" Trajectory														
20	18	14	0.5	0.30	0.37	51	1.4	138	5.5	4.1	1.9	0.11	7.5	9.4
35	20	15	0.7	0.34	0.42		2.5	242	6.1	4.6	2.6	0.16	8.6	10.7
50	21	16	0.8	0.35	0.44		3.5	345	6.4	4.8	3.0	0.18	8.9	11.1
20	20	15	0.8	0.39	0.48	52	1.4	138	6.1	4.6	3.0	0.18	9.8	12.2
35	24	18	1.2	0.40	0.50		2.5	242	7.3	5.5	4.5	0.27	10.2	12.7
50	25	19	1.3	0.40	0.50		3.5	345	7.6	5.7	4.9	0.30	10.2	12.7
20	22	17	1.1	0.44	0.55	53	1.4	138	6.7	5.0	4.2	0.25	11.1	13.9
35	27	20	1.6	0.42	0.53		2.5	242	8.2	6.2	6.1	0.36	10.7	13.4
50	28	21	1.8	0.44	0.55		3.5	345	8.5	6.4	6.8	0.41	11.2	14.0
20	23	17	1.6	0.58	0.73	54	1.4	138	7.0	5.3	6.1	0.36	14.8	18.5
35	31	23	2.2	0.44	0.55		2.5	242	9.5	7.1	8.3	0.50	11.2	14.0
50	32	24	2.5	0.47	0.59		3.5	345	9.8	7.3	9.5	0.57	11.9	14.9
FRODOO SERIES - 25" Trajectory														
20	30	23	1.0	0.21	0.27	4	1.4	138	9.2	6.9	3.8	0.23	5.4	6.8
35	31	23	1.4	0.28	0.35		2.5	242	9.5	7.1	5.3	0.32	7.1	8.9
50	34	26	1.7	0.28	0.35		3.5	345	10.4	7.8	6.4	0.39	7.2	9.0
20	33	25	1.2	0.21	0.26	5	1.4	138	10.1	7.5	4.5	0.27	5.4	6.7
35	37	28	1.6	0.23	0.28		2.5	242	11.3	8.5	6.1	0.36	5.7	7.1
50	38	29	1.9	0.25	0.32		3.5	345	11.6	8.7	7.2	0.43	6.4	8.0
20	32	24	1.4	0.26	0.33	6	1.4	138	9.8	7.3	5.3	0.32	6.7	8.3
35	38	29	1.9	0.25	0.32		2.5	242	11.6	8.7	7.2	0.43	6.4	8.0
50	40	30	2.3	0.28	0.35		3.5	345	12.2	9.2	8.7	0.52	7.0	8.8
20	38	29	2.2	0.29	0.37	7	1.4	138	11.6	8.7	8.3	0.50	7.5	9.3
35	40	30	2.7	0.33	0.41		2.5	242	12.2	9.2	10.2	0.61	8.3	10.3
50	41	31	3.1	0.36	0.44		3.5	345	12.5	9.4	11.7	0.70	9.0	11.3
35	38	29	3.1	0.41	0.52	8	2.5	242	11.6	8.7	11.7	0.70	10.5	13.1
50	42	32	4.0	0.44	0.54		3.5	345	12.8	9.6	15.1	0.91	11.1	13.8
65	43	32	4.6	0.48	0.60		4.6	449	13.1	9.8	17.4	1.04	12.2	15.2
35	42	32	4.2	0.46	0.57	9	2.5	242	12.8	9.6	15.9	0.95	11.6	14.5
50	47	35	5.4	0.47	0.59		3.5	345	14.3	10.8	20.4	1.23	12.0	14.9
65	48	36	6.3	0.53	0.66		4.6	449	14.6	11.0	23.8	1.43	13.4	16.7
35	42	32	5.4	0.59	0.74	10	2.5	242	12.8	9.6	20.4	1.23	15.0	18.7
50	48	36	6.8	0.57	0.71		3.5	345	14.6	11.0	25.7	1.54	14.4	18.0
65	49	37	8.0	0.64	0.80		4.6	449	14.9	11.2	30.3	1.82	16.3	20.3
35	42	32	6.4	0.70	0.87	11	2.5	242	12.8	9.6	24.2	1.45	17.7	22.1
50	48	36	8.1	0.68	0.84		3.5	345	14.6	11.0	30.7	1.84	17.2	21.4
65	51	38	9.5	0.70	0.88		4.6	449	15.6	11.7	36.0	2.16	17.9	22.3
EO95 LOW ANGLE - 13" Trajectory														
20	26	20	0.9	0.26	0.32	4	1.4	138	7.9	5.9	3.4	0.20	6.5	8.1
35	33	25	1.3	0.23	0.29		2.5	242	10.1	7.5	4.9	0.30	5.8	7.3
50	34	26	1.5	0.25	0.31		3.5	345	10.4	7.8	5.7	0.34	6.3	7.9
20	26	20	1.1	0.31	0.39	5	1.4	138	7.9	5.9	4.2	0.25	8.0	9.9
35	33	25	1.4	0.25	0.31		2.5	242	10.1	7.5	5.3	0.32	6.3	7.8
50	35	26	1.7	0.27	0.33		3.5	345	10.7	8.0	6.4	0.39	6.8	8.5
20	26	20	1.4	0.40	0.50	6	1.4	138	7.9	5.9	5.3	0.32	10.1	12.6
35	33	25	1.9	0.34	0.42		2.5	242	10.1	7.5	7.2	0.43	8.5	10.6
50	36	27	2.3	0.34	0.43		3.5	345	11.0	8.2	8.7	0.52	8.7	10.8
20	31	23	2.5	0.50	0.62	7	1.4	138	9.5	7.1	9.5	0.57	12.7	15.9
35	35	26	3.1	0.49	0.61		2.5	242	10.7	8.0	11.7	0.70	12.4	15.4
50	37	28	3.5	0.49	0.61		3.5	345	11.3	8.5	13.2	0.79	12.5	15.6
35	32	24	3.2	0.60	0.75	8	2.5	242	9.8	7.3	12.1	0.73	15.3	19.1
50	38	29	4.0	0.53	0.67		3.5	345	11.6	8.7	15.1	0.91	13.6	16.9
65	39	29	4.7	0.60	0.74		4.6	449	11.9	8.9	17.8	1.07	15.1	18.9
35	34	26	3.9	0.65	0.81	9	2.5	242	10.4	7.8	14.8	0.89	16.5	20.6
50	37	28	4.9	0.69	0.86		3.5	345	11.3	8.5	18.5	1.11	17.5	21.8
65	40	30	5.7	0.69	0.86		4.6	449	12.2	9.2	21.6	1.29	17.4	21.7
35	33	25	5.1	0.90	1.12	10	2.5	242	10.1	7.5	19.3	1.16	22.9	28.6
50	39	29	6.4	0.81	1.01		3.5	345	11.9	8.9	24.2	1.45	20.6	25.7
65	42	32	7.5	0.82	1.02		4.6	449	12.8	9.6	28.4	1.70	20.8	25.9

¹ Precipitation rates for square and triangular spacing calculated at 50% of diameter for half-circle operation. Assumes zero wind for precipitation and radius. Adjust for local conditions.

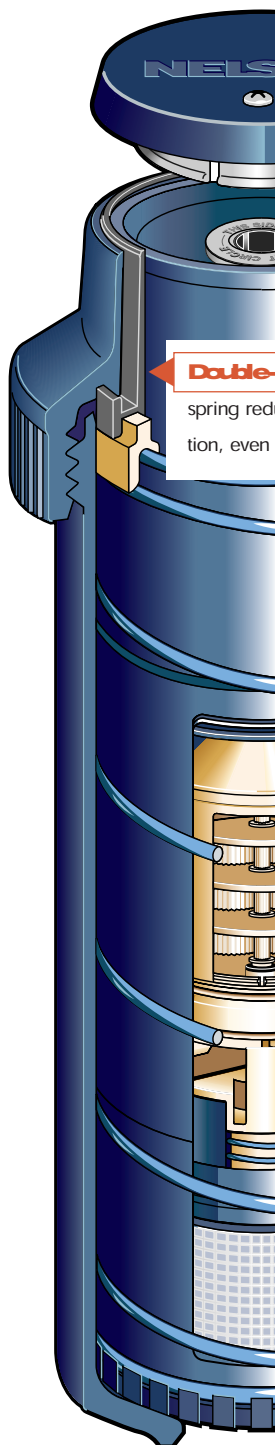

Continuous full or part-circle options in one sprinkler head eliminates need for multiple models; choose from 40° - 310° or a complete 360° rotation

Full rubber cover on pop-up models is safe and vandal resistant with standard locking screw and

Through the cap - NR (nozzle insertion/radius reduction) on all models. Model number is stamped in cover for easy identification

Patented Click-Set Disk offers adjustable part-circle patterns in 5° increments

Double-lipped wiper seal and stainless steel retraction spring reduce unnecessary service calls by assuring positive retraction, even in sandy soils

Exclusive memory ring maintains pattern even if sprinkler is turned out of arc position

Acu-Cover® nozzles provide better close-in watering and eliminate dry spots around head

Ratcheting slip clutch protects gears and motor from damage while adjusting turret for part-circle adjustments - wet or dry

Water lubricated gear motor provides oil-free, quiet, reliable performance

Tall pop-up height assures clearance over high turf areas

Bypass valve reduces pressure loss and standardizes rotation speed regardless of nozzle size, flow rate and inlet pressures

Large area filter provides excellent resistance against sand and debris

Anti-drain valve and heavy-duty spring (ADV models only) help eliminate low head drainage and puddling

5 year warranty on materials and workmanship